CATALOGIC DI DIC AS AD NO. 40961

CALIFORNIA INSTITUTE OF TECHNOLOGY

RESONANCE OSCILLATIONS IN A HOT NON-UNIFORM PLASMA

by Jerald V. Parker

409 614

Technical Report No. 20

Nonr 220(13)

May 1963

A REPORT ON RESEARCH CONDUCTED UNDER
CONTRACT WITH THE OFFICE OF NAVAL RESEARCH

RESONANCE OSCILLATIONS IN A HOT NON-UNIFORM PLASMA

Ъy

Jerald V. Parker

Technical Report No. 20
CALIFORNIA INSTITUTE OF TECHNOLOGY
Pasadena, California

A Technical Report to the Office of Naval Research

Contract Nonr 220(13)

May 1963

RESONANCE OSCILLATIONS IN A HOT NON-UNIFORM PLASMA

J. V. Parker California Institute of Technology

ABSTRACT

The hydrodynamic equations of a hot non-uniform plasms are solved numerically in slab geometry to obtain the resonant frequencies and associated wave functions. The splitting of the various resonances is shown to depend on the parameter: (slab thickness • Debye length).

Resonance Oscillations

in a Hot Non-Uniform Plasma

Jerald V. Parker

Until recently the large splittings of the Dattner resonances have remained unexplained, although a small splitting can be shown to result from non-zero temperatures.

In a recent letter Weissglas² has shown that results in qualitative agreement with observations can be obtained by assuming a non-uniform electron density. In order to facilitate comparison of the theory with experiment it is necessary to calculate the frequencies of the resonances for some approximately correct electron density distributions.

The equations used below to describe the behavior of a non-uniform plasma in the collisionless approximation are the linearized hydrodynamic equations and Maxwell's equations. Since experiments have generally been conducted in plasmas for which one free space wavelength is large compared to the dimensions of the plasma, one can make a quasi-static analysis.

The equations are then

$$\frac{\partial n_1}{\partial t} + \nabla \cdot n_0 f(\underline{r}) \underline{y}_1 = 0 \tag{1}$$

$$\frac{\partial \mathbf{Y}_{1}}{\partial \mathbf{t}} = \frac{1}{\mathbf{m} \mathbf{n}_{0} \mathbf{f}} \left[-\mathbf{n}_{1} \mathbf{e} \, \mathcal{E}_{0} - \mathbf{n}_{0} \mathbf{f} \, \mathbf{e} \, \mathcal{E}_{1} - \nabla \, \mathbf{P}_{1} \right] \tag{2}$$

$$\nabla \cdot \underline{E}_1 = -\frac{e}{\epsilon_0} n_1 \tag{3}$$

where $n_{O}f(\underline{r})$ is the steady state electron density and where it has been

assumed that

$$n = n_0 f(\underline{x}) + n_1 \qquad f(0) = 1$$

$$\underline{y} = \underline{y}_1$$

$$\underline{\mathcal{E}} = \underline{\mathcal{E}}_0 + \underline{\mathcal{E}}_1$$

$$P = p_0 f + P_1$$

Since these waves will propagate adiabatically we can relate p_1 and m_1 as follows:

$$p_1 = \gamma kT n_1 \tag{4}$$

Combining equations (1) through (4), assuming an $e^{-i\omega t}$ dependence, and letting $\mathcal{E}_1 = -\nabla \phi_1$

$$\nabla_{c}^{4} \not p_{1} - \frac{\mathbf{f'(r)}}{\mathbf{f(r)}} \nabla^{3} \not p_{1} + \frac{1}{\mathbf{f}} \left[\left(\frac{\mathbf{w}^{2}}{\mathbf{w}_{\mathbf{p_{0}}}^{2}} - \mathbf{f(r)} \right) \frac{1}{\lambda_{D}^{2}} - \frac{\mathbf{f''}}{\mathbf{f}} + \left(\frac{\mathbf{f'}}{\mathbf{f}} \right)^{2} \right] \nabla^{2} \not p_{1} - \frac{\mathbf{f'}}{n_{D}^{2}} \nabla \not p_{1} = 0$$

$$(5)$$

where

$$\omega_{p_0}^2 = \frac{n_0 e^2}{m\epsilon_0} \qquad \qquad \lambda_D^2 = \frac{\epsilon_0 kT}{n_0 e^2}$$

are the plasma frequency and the Debye length at the point $\underline{r} = 0$. Despite the complexity of this equation the calculations progress quite easily if one chooses to work in plane geometry.

If one considers the one-dimensional problem illustrated in Figure 1, the following simplifications can be made. First only $\mathcal{E}_{\mathbf{z}}$ exists which

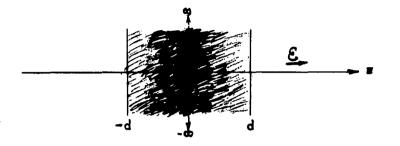


Figure 1.

reduces the order of the equation by one; second, the resulting equation can be integrated once to yield

$$\frac{\mathrm{d}^2 E_1}{\mathrm{d}z^2} - \frac{1}{\gamma} \frac{f'(z)}{f(z)} \frac{\mathrm{d}E_1}{\mathrm{d}z} + \frac{1}{\gamma n_D^2} \left[\frac{\omega^2}{\omega_{\mathbf{p}_O}^2} - f(z) \right] E_1 = K \qquad (6)$$

Using the boundary condition that V_1 normal vanishes at the edge of the plasma, one can evaluate the constant K .

$$K = -\frac{\omega^2}{\omega_{p_0}^2} \frac{1}{\gamma \lambda_p^2} E_1(d) \qquad (7)$$

The final simplification results if one changes to the dimensionless variable s = z/d and recognizes that a resonance in this plane geometry is characterized by the vanishing of the external field so that one need solve only the homogeneous equation

$$\frac{d^2E_1}{ds^2} - \frac{f!}{\gamma f} \frac{dE_1}{ds} - A(B - f)E_1 = 0$$

$$A = \frac{1}{\gamma} \left(\frac{d}{\lambda_D}\right)^2 , \qquad B = \left(\frac{\omega^2}{\omega_{\mathbf{p}_O}^2}\right)$$

The density functions f(z) used in these calculations are taken from the work of S. Self³ and represent theoretical curves for a low density plasma. They are shown in Figure 2. The small slope discontinuities are due to the approximation used in the calculations.

The results of numerical solution of this equation for several values of the parameter $(\frac{d}{\lambda_D})^2$ are shown in Figure 3. The circle points are the results of numerical solution of the differential equation. The triangle points were found using the WKB method since the differential equation is difficult to solve for very short wavelengths. The dotted lines connecting the points are included to show which points belong to the same mode and to indicate the general trend of the frequencies but do not represent actual data. The solid line shows the ratio of mean density to the square of the frequency of the lowest mode $\frac{1}{n_0 f}/\omega_0^2$.

In general it may be seen that the splitting of the resonant frequencies is dependent on the parameter (d/λ_D) and the splitting is largest for small values of this parameter.

Figures 4 and 5 show how this strong splitting is induced by the non-uniform plasma density. Both figures show the electric field at resonance for various different modes. Figure 4 shows the modes ω_0 , ω_1 , ω_2 , ω_3 for a fixed value of $(d/\lambda_D)^2$. At a given frequency ω that portion of the plasma for which $\omega^2 > \frac{n(z)e^2}{m^2}$ $(z>z_c)$ can propagate plasma waves, while the remainder cannot. As ω is increased the propagating region becomes longer and successively more half

wavelengths of the wave can be fit into it.


In Figure 5 the mode ω_0 is shown for various values of $(\frac{d}{\lambda_D})^2$. One can see that as $(\frac{d}{\lambda_D})^2$ increases the wavelength of the oscillation decreases. Since the thickness of the sheath and the wavelength are proportional to λ_D the resonant frequency of the mode ω_0 , which can propagate primarily in the sheath region, tends to remain constant.

It is conceivable that this effect might cause one or more resonances to remain at frequencies below the lowest plasma frequency $\frac{n_0 f(d) e^2}{m \varepsilon_0} \quad \text{(see Fig. 2 for } (d/\lambda_D)^2 = \alpha) \quad \text{in the limit } \lambda_D \to 0 \quad \text{This would mean that the resonances would remain split even in the limit of zero temperature and that the curves in Figure 3 would tend to a limit <math display="block">> 1 \quad \text{as } (\frac{d}{\lambda_D}) \to \infty \quad \text{This does not, however, seem to be the case although one cannot be certain of extrapolations based on such limited data.}$

I wish to express my appreciation to R. W. Gould and to the Office of Naval Research and the National Science Foundation for supporting this research.

References

- R. W. Gould, Proc. of the Linde Conference on Plasma Oscillations, 1959 (unpublished).
- 2. P. Weissglas, Phys. Rev. Letters, 10, 206 (1963).
- 3. S. Self, Physics of Fluids (To be published).

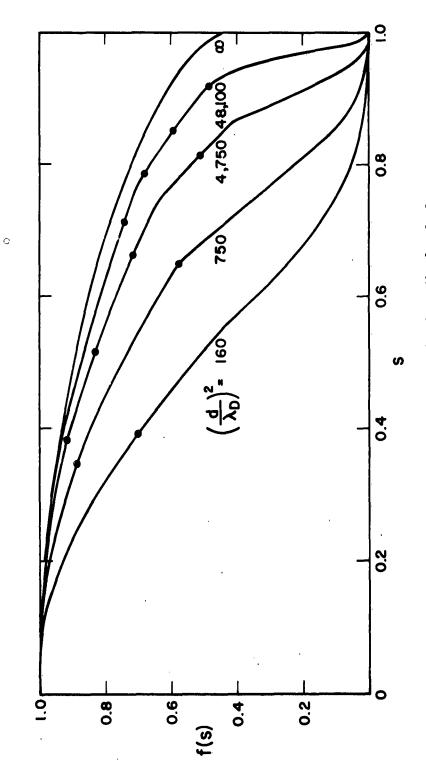

Electron Density Profiles. The points where the local plasms frequency equals one of the resonant frequencies, i.e., F18. 2.

 $\frac{n_0}{m\epsilon_0} \frac{2}{f(s)} = \omega_1^2 \quad (1 = 0, 1, \cdots) \quad \text{are indicated.}$

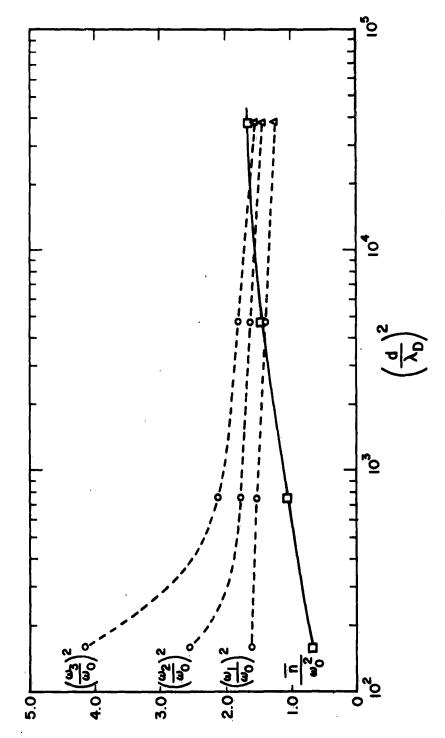
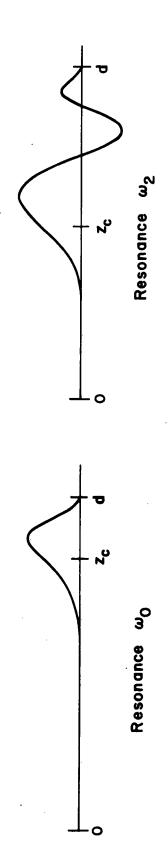


Fig. 3. Resonant Frequencies and Average Density





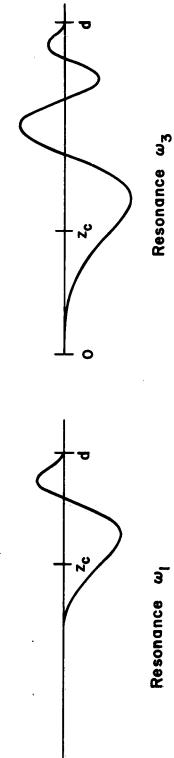


Fig. 4. $\mathbf{E}_{\mathbf{z}}$ versus $\mathbf{z} (\mathbf{d}/\lambda_{\mathbf{D}})^2 = 4740$

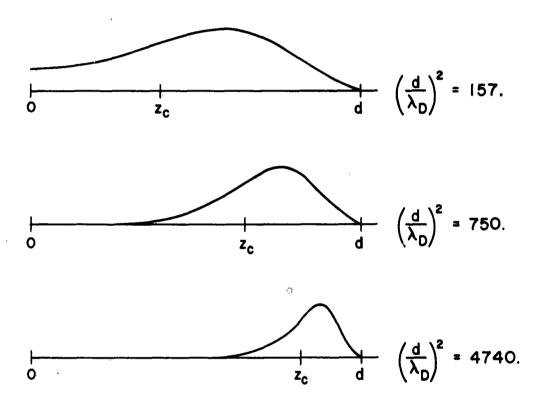


Fig. 5. E_z versus z for the Resonance ω_0

Wonr 220(13)

DISTRIBUTION LIST

Chief of Naval Research 2 Navy Department - CODE 427 Washington 25, D. C.	Re De	mmittee on Electronics 1 search and Development Board spartment of Defense shington 25, U. C.		Electronic Components Div. Power Tube Department Microwave Lab at Stanford	ı
Director, Naval Research Lab.	Wa At	rector, Matl.Bureau of Stds. lahington 25, D. C. thn: Div.14.0 CRPL, Librarian namanding Officer 1		Palo Alto, California Dr. E. D. McArthur Electron Tube Laboratory General Electric Company Schenectady, New York	٠
CODE 5430 1 Commanding Officer 1 ONR Branch Office 1000 Geary Street San Francisco, California	En Fo Co	ngineering Res. and Dev. Lab ort Belvoir, Virginia ommanding Officer l rankford Arsensi	ı		1
Scientific Liaison Officer 25 ONR, London c/o Navy 100, Box 39, FPO New York, New York	R1. 30 Ba	ridesburg, Philadelphia, Pa. itel-McCullough, Inc. 1 11 Industrial Way In Carlos, California TH: Research Library	1	Johns Hopkins University Radiation Laboratory 1315 St. Paul Street Baltimore 2, Maryland Attn: W.Poole, Librarian	1
Commanding Officer OMR Branch Office 1030 E. Green Street Pasadena, California	Co Wa		1	Research Lab. of Electronics Massachusetts Inst. of Tech. Cambridge 39, Massachusetts	1
Commanding Officer l ONR Branch Office The John Crerar Library Bldg.	A 2	ommanding General, CRRE .F. Cambridge Research Center 30 Albany Street ambridge 39, Massachumetts	1	Sloane Physics Laboratory Yale University New Haven, Connecticut Attn: R. Beringer	1
86 E. Randolph Street Chicago 1, Illinois Commanding Officer ONR Branch Office	R. G	ommanding General RCRW ome Air Development Center riffiss Air Force Base ome, New York	1	Mr. H. J. Reich Department of Electrical Eng. Yale University	1
Office of Naval Research	5 8 7		1	Hew Haven, Connecticut Laboratory for Insulation Res. Massachusetts Inst. of Tech. Cambridge 39, Massachusetts Attn: A. von Rippel	1
Navy 100, FPO New York, New York Chief, Bureau Aeronautics EL4 Navy Department EL43		Electronic Defense Laboratory 2.0. Box 205	1	Lincoln Laboratory Massachusetts Inst. of Tech. Cambridge 39, Massachusetts	1
Washington 25, D. C. BL45 . Chief, Bureau of Ordnance Navy Department Re 4 Washington 25, D. C. Re 9	1 [Department of the Navy 820	1 1 1	Dr. J. M. Lafferty, Manager Physical Studies General Electric Company P.O. Box 1088	1
Chief of Naval Operations Op20X Navy Department Op421 Washington 25, D. C. Op 55	1 P 1 P	Material Lab. Library 9128 New York Maval Shippard Brooklyn 1, New York	1	Schenectady, New York General Electric Company One River Road Schenectady 5, New York	1
Director, Naval Ordnance Lab. White Oak, Maryland Director, Naval Electronics Lab	_ !	Office of Technical Services Department of Commerce Washington 25, D. C.	1	Attn: Miss W. Crain, Librarian Technical Report Collection	1.
San Diego 52, California Dept. of Electronics-Physics	. :	Director CR4582 Air University Library Maxwell A.F. Base, Alabama	1	303A Pierce Hall Harvard University Cambridge 38, Massachusetts	
U.S. Naval Post Grad. School Monterey, California Commander CODE 366 Naval Air Missile Test Center	1	Chief, Western Division Office of Aerospace Research Office of Scientific Research P.O.Box 2035, Pasadena, Calif.	1	Electron Tube Section Electrical Engineering Dept. University of Illinois Champaign, Illinois	1
Point Mugu, California U.S. Naval Proving Ground Attn: W. H. Benson	1	Technical Library Research and Development Board Pentagon Building Washington 25, D. C.	1	Chairman, Div.of Elec. Eng. University of California Berkeley 4, California	1
Dahlgren, Virginia Commander U.S.Naval Air Development Cente Johnsville, Pennsylvania	1	Advisory Group on Electron Tuber 346 Broadway (5th Floor) New York 13, New York	• 1	Radiation Laboratory Tech. Information Division University of California Berkeley 4, California	
Thermionics Branch Signal Corps Eng. Labs. Evans Signal Lab, Bldg.42 Belmar, New Jersey	5	Dr. G. E. Barlow Australian Joint Service Staff Box 4837 Washington 8, D. C.	1	Dr. A. W. Trivelpiece Department of Elec. Eng. University of California Berkeley 4, California	1
Commander Armed Services Tech. Inform. ATTM: TIPDR Arlington Hall Station	10	Microwave Library W. W. Hansen Labs. of Physics Stanford University Stanford, California	1	Periodicals Librarian General Library California Inst. of Technolog Pasadens, California	a 1
Arlington 12, Virginia Ballistics Research Labs Aberdeen Proving Ground	2	Engineering Library Stanford University Stanford, California		Dr. Z. Kaprielian Electrical Engineering Dept. University of Southern Calif. Los Angèles 7, California	3
Maryland Attn: D.W.H. Delsasso Chief, Ordnance Develop. Div. Natl.Bureau of Standards	2	Electronics Lab. Library Stanford University Stanford, California	1.	Supervisor of Research Lab. Electrical Engineering Bldg. Purdue University	3
Connecticut Av, Van Ness St.NW Washington 25, D. C. Naval Research Laboratory	6	Technical Library General Electric Microwave Lab 601 California Avenue Palo Alto, California	. 1	Lafayette, Indiana Georgia Institute of Techn. Atlanta, Georgia ATTM: Librarian	:
Washington 25, D. C.				WYTH: THE PARTY PORT	

				Page 1
W. E. Lear University of Florida Department of Electrical Eng. Gainesville, Florida Director Electronics Defense		Countermeasures Laboratory Cilfillan Brothers, Inc. 1815 Vanice Boulevard Los Angules, California The Rand Corporation	1	Applied Research, RCA Camden 2, New Jersey ATTN: R. E. Skinner Bldg.10-8, Sect.421
Engineering Research Inst. University of Michigan Ann Arbor, Michigan	•	1700 Main Street Santa Monica, California ATTH: Librarian	1	Bomac Laboratories, Inc. Salem Road Beverly, Massachusetts ATTN: Arthur McCoubrey
Cornell Aeronautical Lab Cornell Research Foundation Buffalo 21, New York	1	Motorola Riverside Res. Lab. 8330 Indiana Avenue Riverside, California ATIN: Mr. John Byrne	1	Aerospace Corporation Poet Office Box 95085 Los Angeles 45, California Attn: F. L. Vernon, Jr.
Director, Microwave Res.Inst. Polytechnic Inst.of Brooklyn 55 Johnson Street Brooklyn 1, New York	1	Ramo-Wooldridge Corporation Control Systems Division F.O. Box: 900B	1	Space-General Corp. 9200 E. Flair Drive El Nonte, California
University of Washington Department of Elec. Eng. Seattle, Washington ATTN: E. A. Harrison	1	Hawthorne, California ATTN: Librarian		ATTH: Bruce Ferrell, Lib. Horthern Electric Co. Ltd., Research and Devel. Labs.
A. V. Eastman University of Colorado Department of Elec. Eng. Boulder, Colorado	1	Dr. James E. Shepherd General Manager Sperry Rand Research Center P.O. Box 400	1	Library, Dept. 8421 P.O. Box 3511, Station C Ottawa, Ontario, Canada Dalmo Victor Company
University of Colorado Engineering Experiment Sta. Boulder, Colorado	1	Sudbury, Massachusetts W. L. Maxson Corporation 460 West 34th Street	1	Division of Textron, Inc. Belmont, California ATTH: Librarian
ATTM: W. G. Worcester Electrical Engineering Dept. Princeton University Princeton, New Jersey	1	Hew York 1, New York ATTN: M. Simpson Bertram G. Ryland, Manager Spencer Laboratory	1	Dr. W. B. Drumond General Atomic P. O. Box 608 Sen Diego 12, California
Professor W. P. Dyke Linfield College McMinnville, Oregon	1	Raytheon Manufacturing Co. Burlington, Massachusetts Westinghouse Electric Corp.	1	Dr. M. Gottlieb Princeton University Plasma Physics Laboratory
Research Lab.of Electronics Chalmers Institute of Tech. Gothenburg, Sweden ATTN: Librarian	1	Electronic Tube Division Elmira, New York ATTM: Mr. S.S.King, Librarian Mr. Gilbert Kelton	1	Princeton, New Jersey Dr. R. F. Post Radiation Laboratory Livermore, California
Columbia Radiation Lab. 538 W. 120th Street New York 27, New York	1	Security Officer Philips Laboratories Irvington-on-Hudson, New York		Dr. W. Kunkel U.C. Radiation Laboratory Berkeley, California
Cascade Research	,	R. E. McGuire, Librarian Boeing Airplane Company P.O. Box 3707 Seattle 24, Washington	1	Dr. R. J. Mackin Jet Propulsion Laboratory Passalena, California
5245 San Fernando Road Los Angeles 39, California	1	A. Simon General Atomic P. O. Box 608 San Diego, California	1	Dr. M. Allen Micromya Associates Burlington, Massachusetts
Varian Associates 611 Hansen Way Palo Alto, California John Dyer	1	Image Instruments, Inc. 2300 Washington Street Newton Lower Falls 62, Mass.	1	Dr. Irving Kaurman Space Technology Laboratories 1 Space Park Redondo Beach, Calif.
Airborne Instrument Lab Mineola, New York Bell Telephone Laboratories	1	Sylvania Electric Prod. Inc. Waltham, Massachusetts ATTN: Charles A. Thornhill	1	
Murray Hill, New Jersey ATTN: J. R. Pierce Hughes Aircraft Company Culver City, California	1	Research Division Library Raytheon Company 28 Seyon Street Waltham 54, Massachusetts	1	
ATTR: Mr. Milek, Librarian	ı	ITT Laboratories 15151 Bledsoe Street San Fernando, California	1	
	1	Technical Research Group Inc. 2 Aerial Way Syosset, New York		
Technical Information Library 463 W. Street New York 14, New York RCA Laboratories	1	Advanced Techniques Branch Electronics Technology Lab. Aeronautical Systems Division Wright-Patterson AFB, Ohio	1	
Princeton, New Jersey ATTN: Dr. W. M. Webster Federal Telecommunic. Labs	1	Microwave Physics Laboratory Sylvania Electric Products P.O. Box 1296 Mountain View, California	1	
500 Washington Avenue Nutley, New Jersey ATTN: W. Derrick K. Wing	1	U. S. Atomic Energy Commission Tech. Information Service Ext. P.O. Box 62	1	
•		Oak Ridge, Tennessee		